





Bonjour tout
le monde

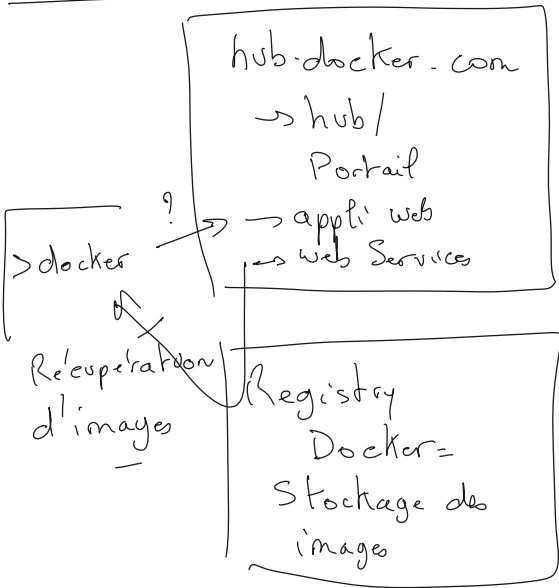

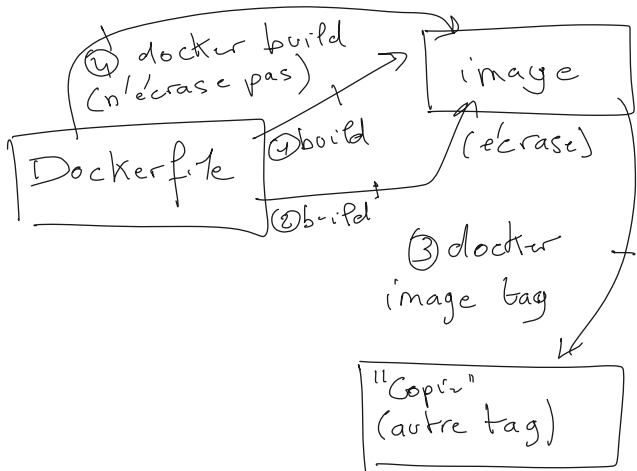

Workflow global:

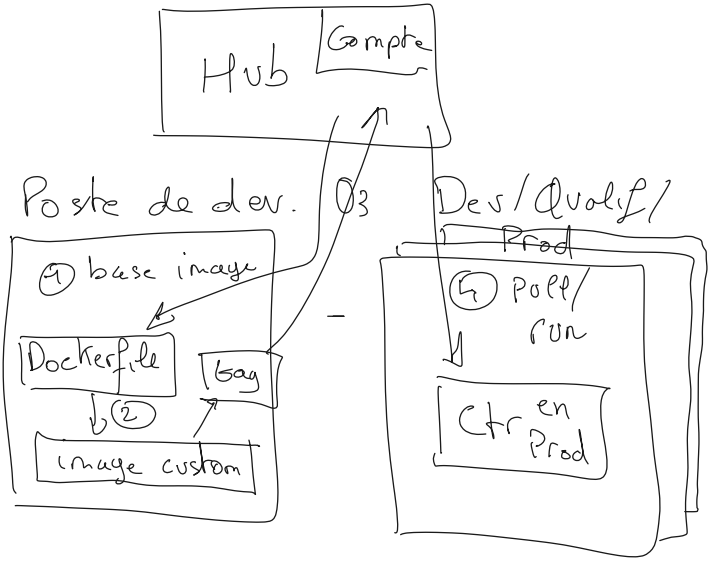

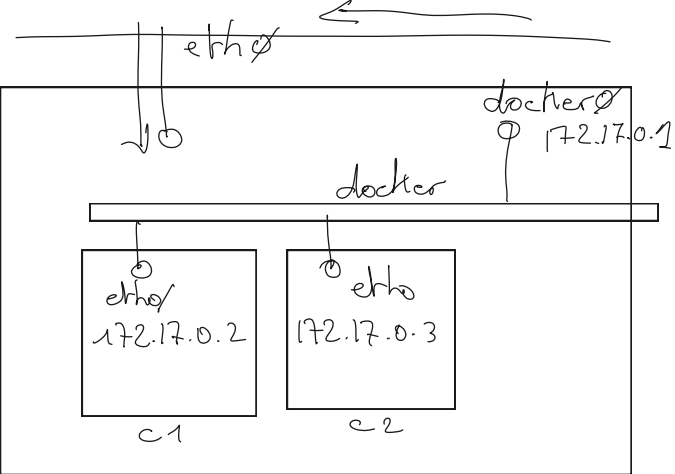


~~PG 10~~



→ binaires

→ données

~~PG 10~~

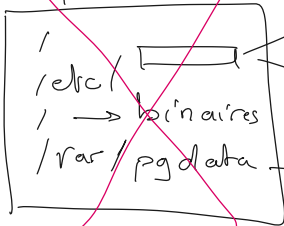

→ binaires


dossiers
fichier

→ données

↳ À garder!



basculer

PG 11

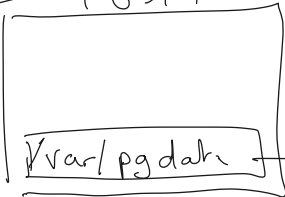

/var/lib/docker/overlay/.../

bien connus

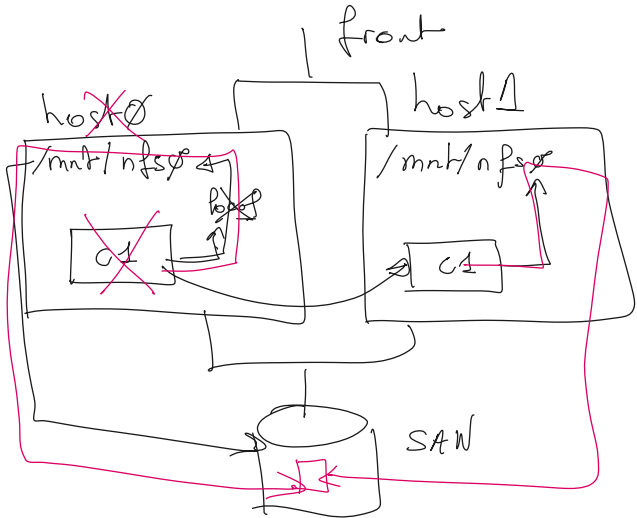

index.html

host


<< volumes >>

/etc/passwd / logs

/ bdd

/ session


/var/log
/var/pg
/tmp



httpd

httpd

httpd



container


run

~~-v~~ ~~-v~~ ~~-v~~ ~~--volumes-from~~


host:

/docker/bin/conv

-v host:container
<<volume>>

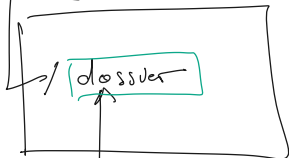

<<Service>>




→ --volumes-from

Person icon -- pink bold: SRV3 → IP


↓ → ping SRV3

~~Pink bold~~

A depends de B



IP?
login?
Pass = ?



bold

